

RL1

线阵系列




细节展示



技术参数

频率响应 45Hz-18KHz (-3dB)	接线位号 1+/1- (LF1); 2+/2- (LF2); 3+/3- (MF); 4+/4- (HF)
最大输出声压级 LF/141dB; MF/143.6dB; HF/143.9dB	标称指向性 (-6dB) 水平 (90° -120°) 垂直 (取决于音箱的数量和线源的曲率)
灵敏度 (1W/1m) LF/102dB; MF/108.5dB; HF/114.5dB	接线端口 2x 8-points Speakon® 1x Link cable
AES功率 LF1/1000W; LF2/1000W; MF/800W; HF/220W	箱体机械可调角度 0° 0.5° 1° 1.5° 2° 2.5° 3° 4° 5°
音乐功率 LF1/2000W; LF2/2000W; MF/1600W; HF/440W	吊挂组件 优质不锈钢配特制户外烤漆
标称阻抗 LF1/8ohm; LF2/8ohm; MF/8ohm; HF/8ohm	箱体漆面 全桦木胶合板, 黑色聚脲耐磨漆
驱动器 低音: 2x12" 钹磁 中音: 4x6.5" 钹磁 高音: 2x3" 钹磁钛膜压缩驱动器	防水防尘等级 IP54
声学模式 低音: 低频反射式 中音: 低频反射式 高音: 平面波导	箱体尺寸 (W宽xH高xD深) mm 1178x390x587mm
	净重 102Kg
	料号 12313100214799

配件搭配

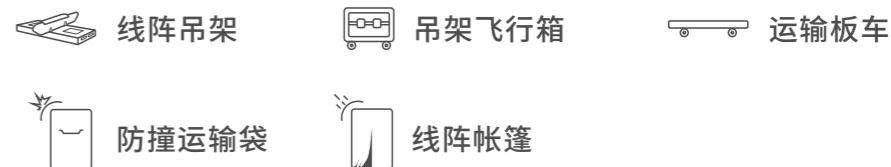

尺寸 (mm)

